


HORMEN


ČLEN ČEZ ESCO

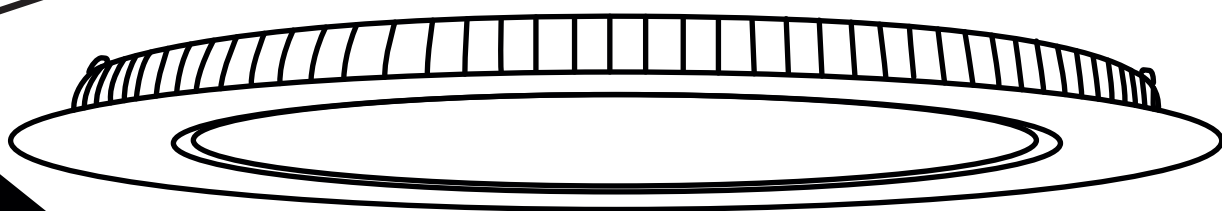


OIZZO FLAT

OIZZO FLAT


1

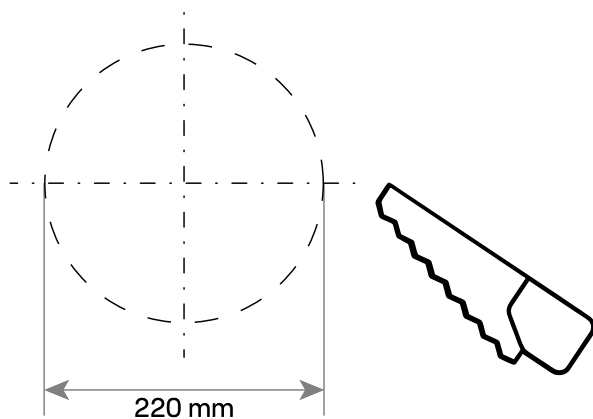


2

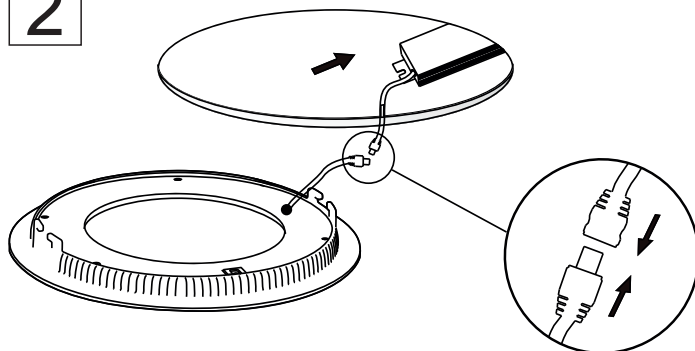


3

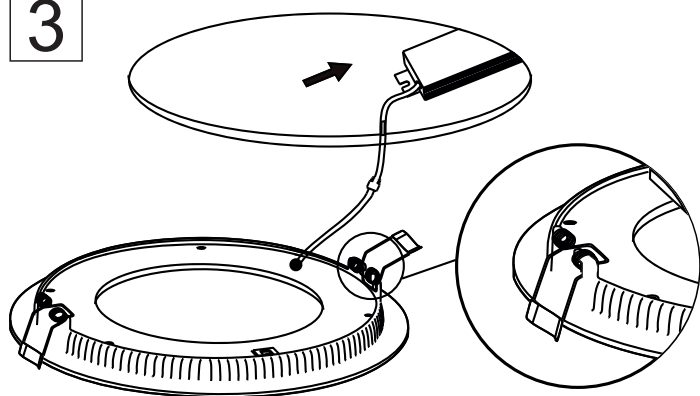

4

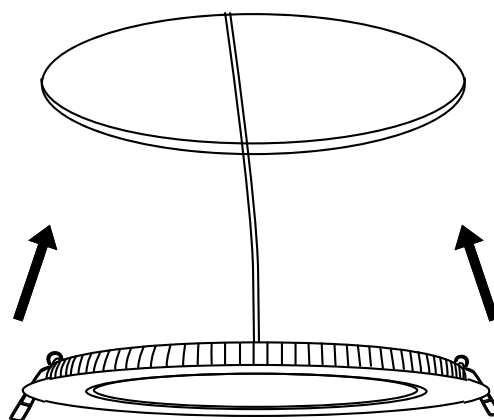


5

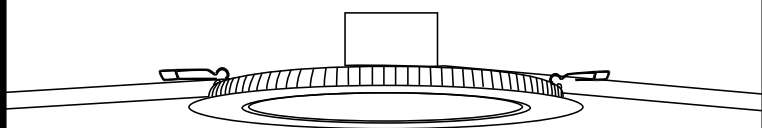


Zapojení driveru

1

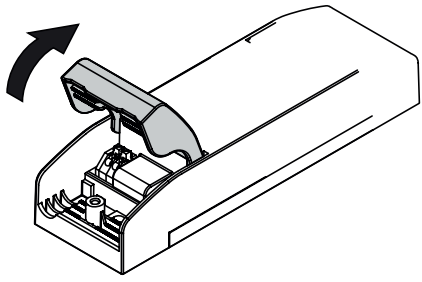


2

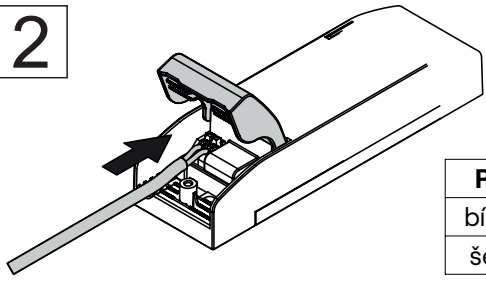


Polarita vodičů	
bílá/červená	+
šedá/černá	-

3

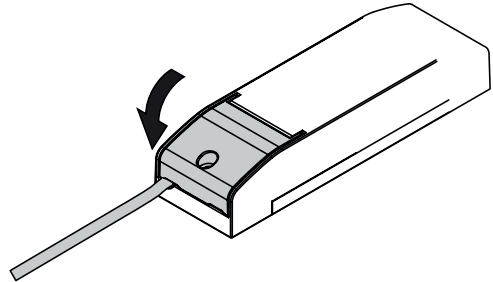


4

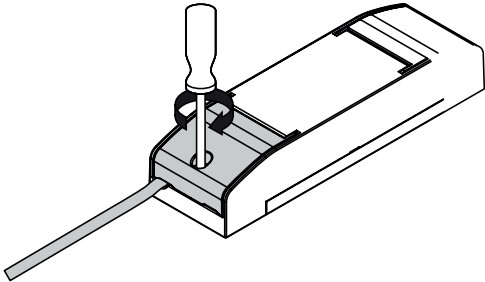

EVG

DALI

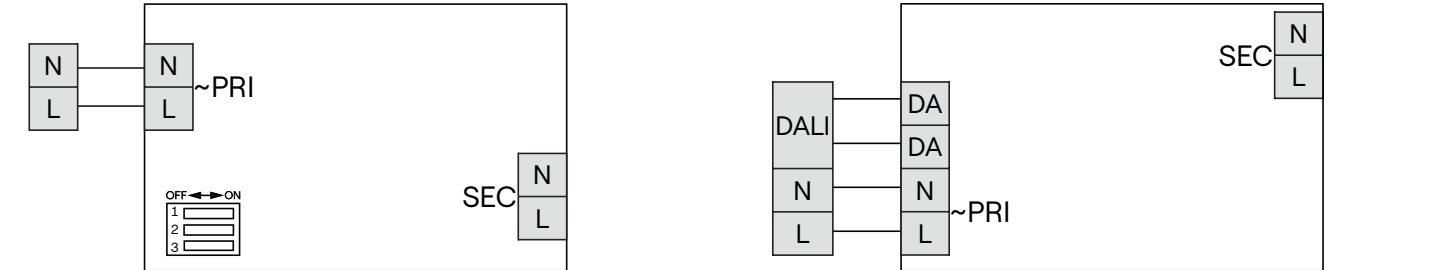

	350 mA	400 mA	450 mA	500 mA	550 mA	600 mA	650 mA	700 mA
P (W)	11,3	13,4	14,8	16,7	18,3	19,7	21,0	23,5
lm	1360	1640	1810	2030	2210	2380	2530	2820

Označení svítidla 279-543000.x10	Počet sv. na jistič B10A IT FIT 30/220-240/700 CS I – 36ks TCI professionelle NFC 38 – 30ks	Specifikace Napájení: 220-240 VAC, 50/60 Hz Elektrická třída ochrany: II
--	--	---



CZ

ÚDRŽBA - Před případnou údržbou svítidla, která zahrnuje především čištění optického systému, se ujistěte, že máte vypnuté zdroje přívodu elektrické energie nebo v opačném případě postupujte s vyšší opatrností. Veškeré plochy svítidla je nutné utírat suchým hadříkem bez jakýchkoliv saponátů.

UPOZORNĚNÍ - Před každým zásahem do svítidla nebo prováděním údržby a servisu je nutno svítidlo odpojit od elektrické sítě. Tuto činnost smí provádět pouze osoba s odpovídající elektrotechnickou kvalifikací.

PODMÍNKY PROVOZU - Svítidlo je určeno pro připojení na pevný přívod. Je nutné zabezpečit, aby přívodní kabel nebyl namáhán tahem ani kroucením. Instalaci svítidla smí provádět pouze osoba s odpovídající elektrotechnickou kvalifikací. Přívodní kabel musí mít plné jádro o průřezu od 0,5 do 1,5 mm² a délkou odizolovaných konců 10 mm.

Výrobce nenese odpovědnost za nesprávné zacházení s produkty.

EN

MAINTENANCE - Before any maintenance of the luminaire, which includes cleaning the optical system, be sure to disconnect the power supply or, if not, proceed with great caution. All surfaces of the luminaire must be wiped with a dry cloth without any detergent.

WARNING - Before any intervention on the luminaire or when performing maintenance or servicing, the luminaire must be disconnected from the power supply. This activity may only be carried out by a person with appropriate electrical qualifications.

CONDITIONS OF OPERATION - The luminaire is intended for connection to a fixed power supply. It must be ensured that the supply cable is not subjected to tension or twisting. Installation of the luminaire may only be carried out by a person with appropriate electrical qualifications. The supply cable must have a solid core with a cross-section of 0.5 to 1.5 mm² and a stripped ends length of 10 mm.

The manufacturer is not responsible for incorrect handling of the products.



hormen@hormen.cz
www.hormen.cz