


HORMEN

ČLEN ČEZ ESCO

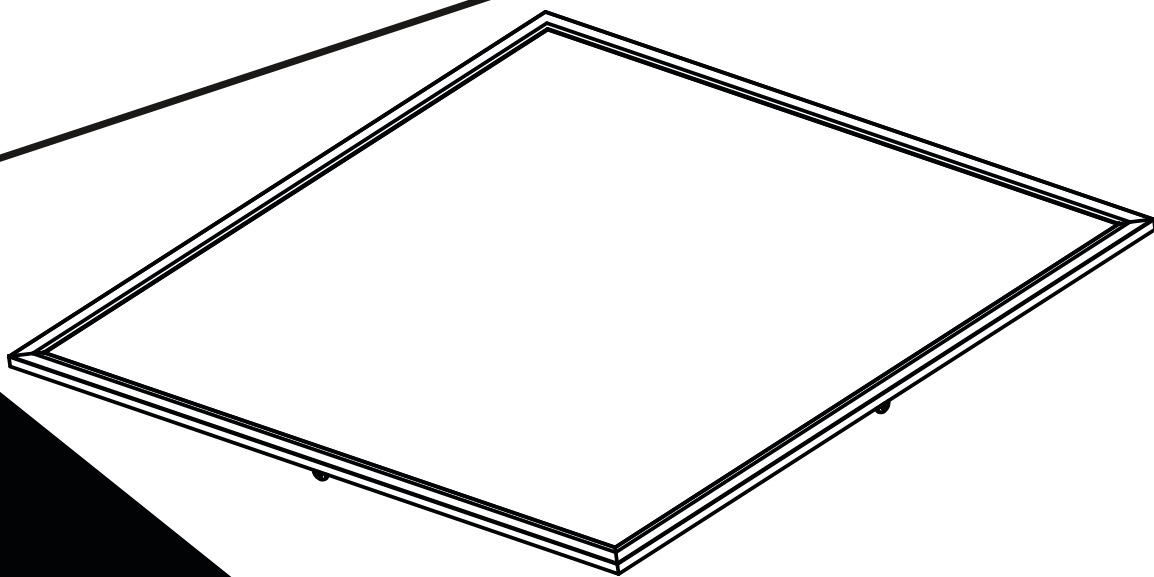


LED PANEL


LED PANEL

Přisazená montáž


1

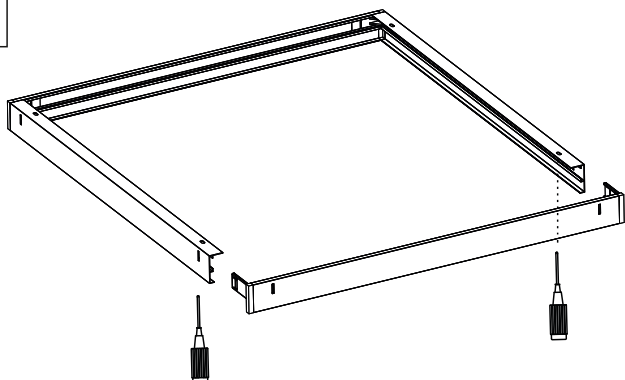


2

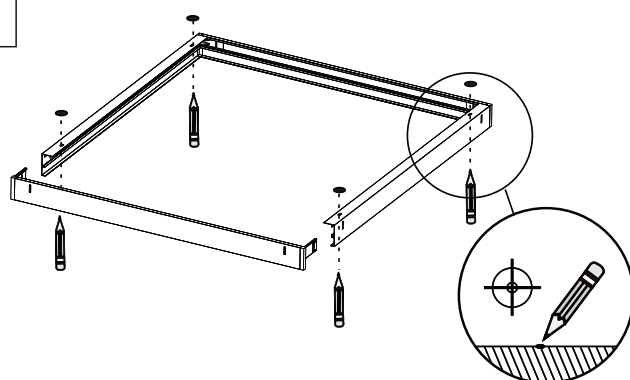


3

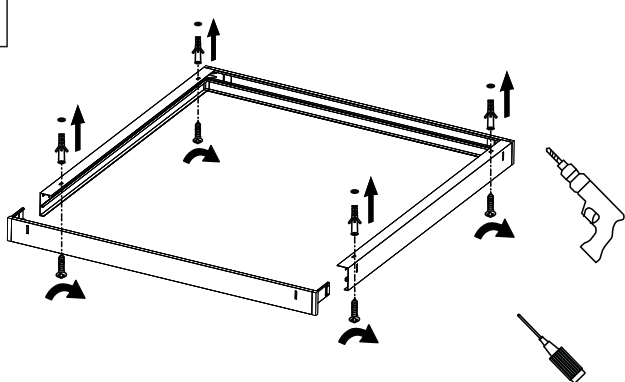


4

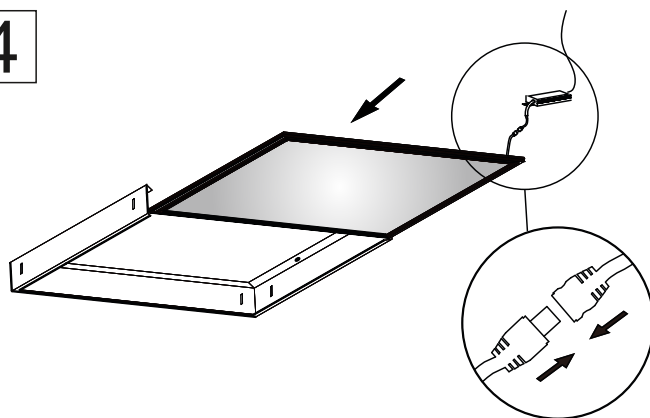

5

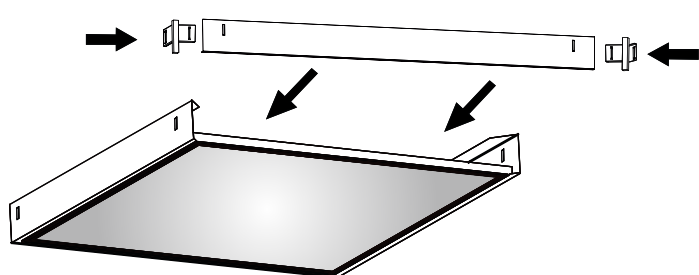


6

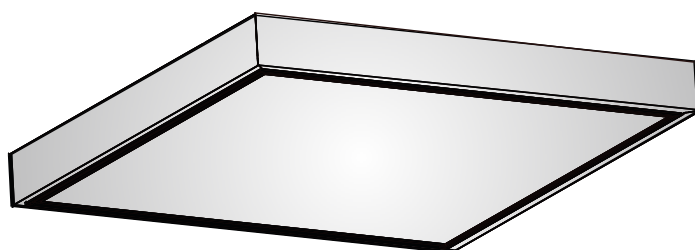


Závěsná montáž

1


Rozměry	A(mm)	B(mm)
595x595	563	563
1195x295	1126	281




2

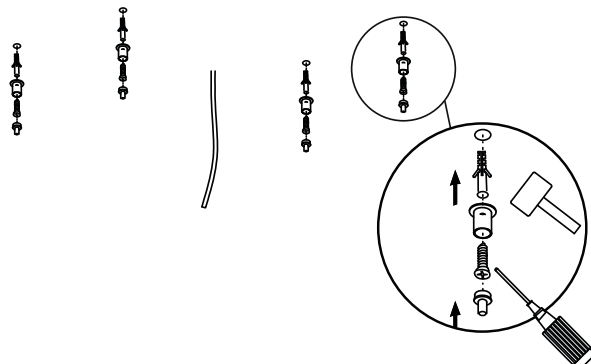


3

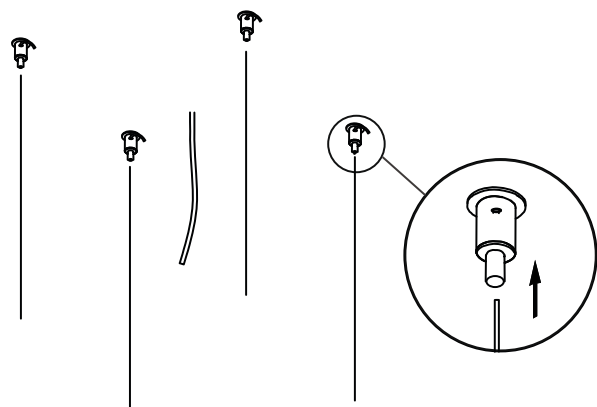


4

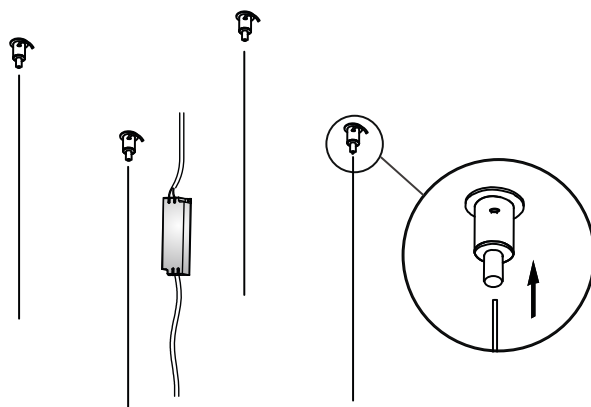


5

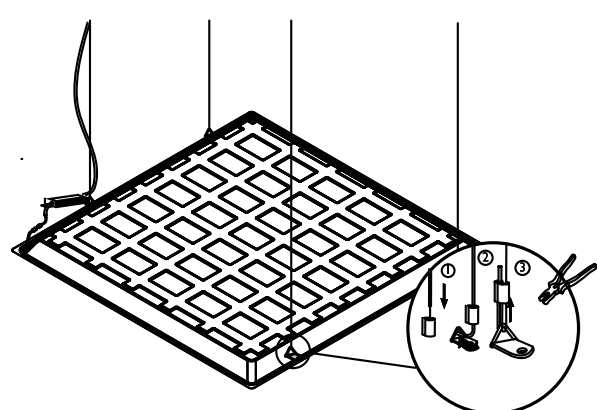

6

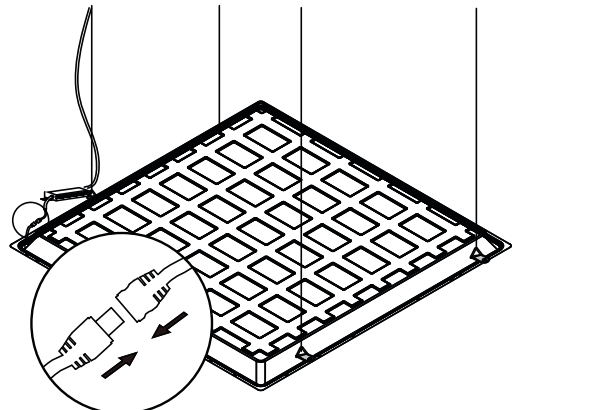


7

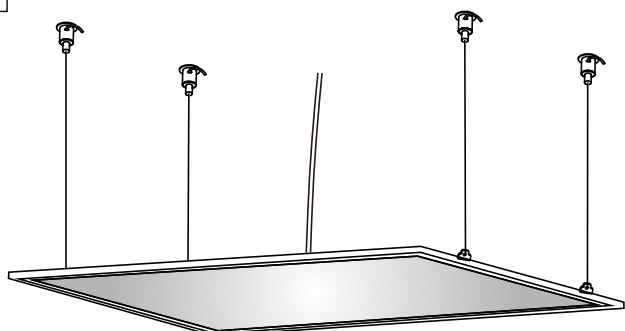


LED PANEL

Montáž do SDK


1




Rozměry	A(mm)	B(mm)
620x620	605+2	605+2
595x595	577+2	577+2
295x1195	277+2	1177+2




2

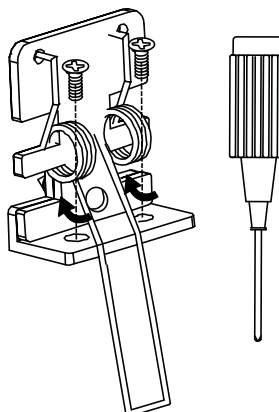


3

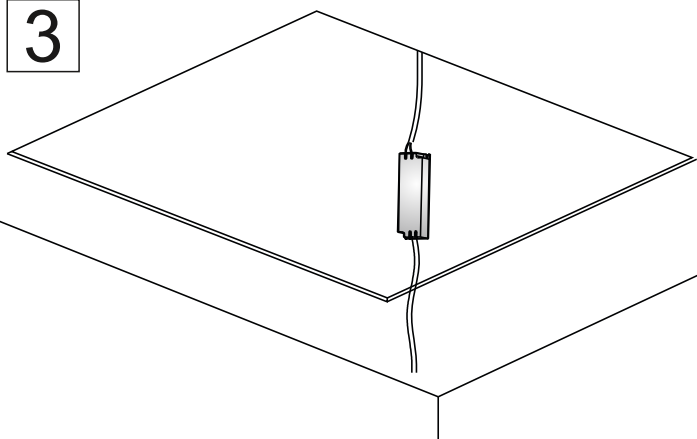


4

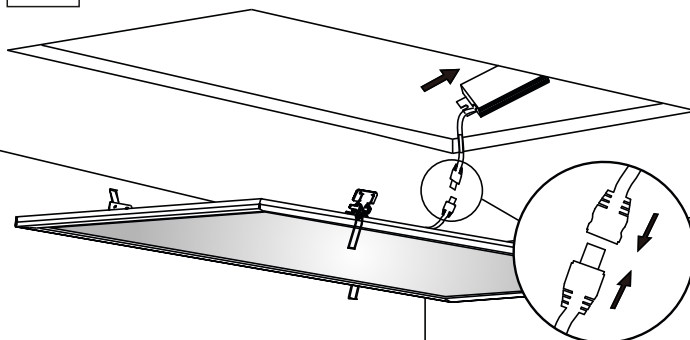

5






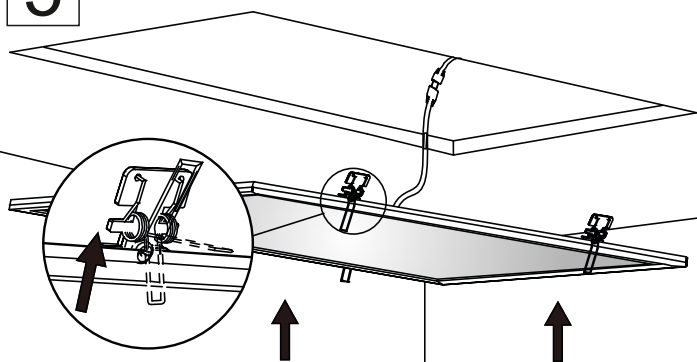


6

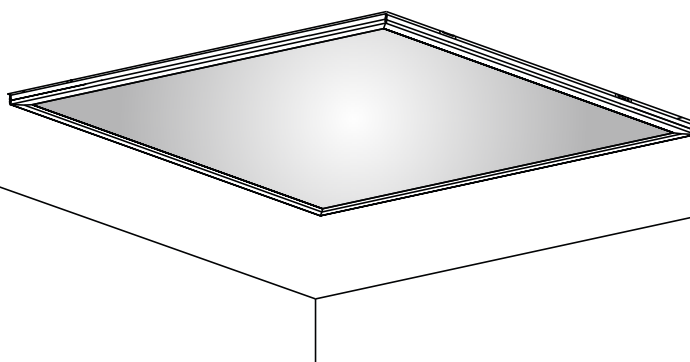



LED PANEL

Vestavná montáž do rastrového stropu

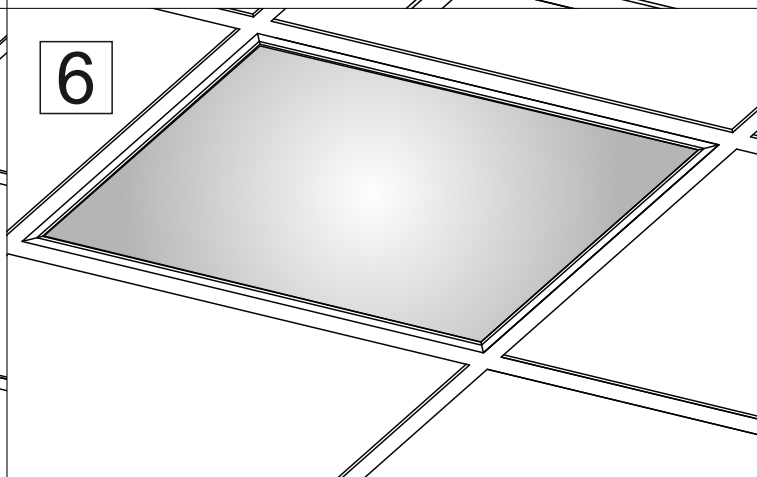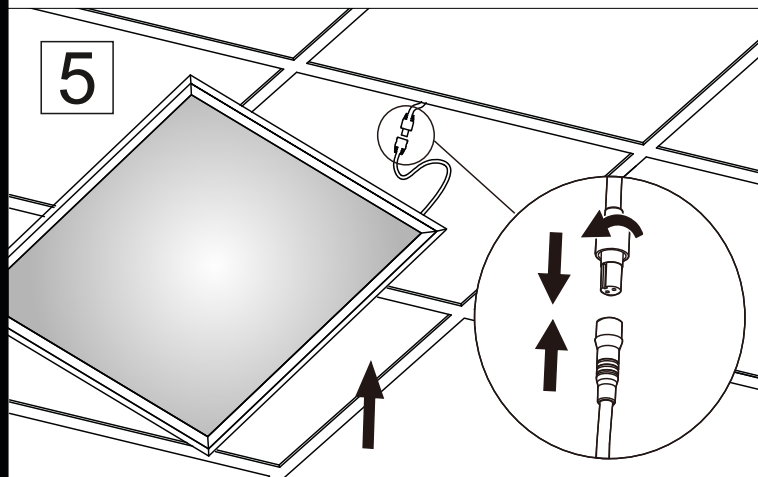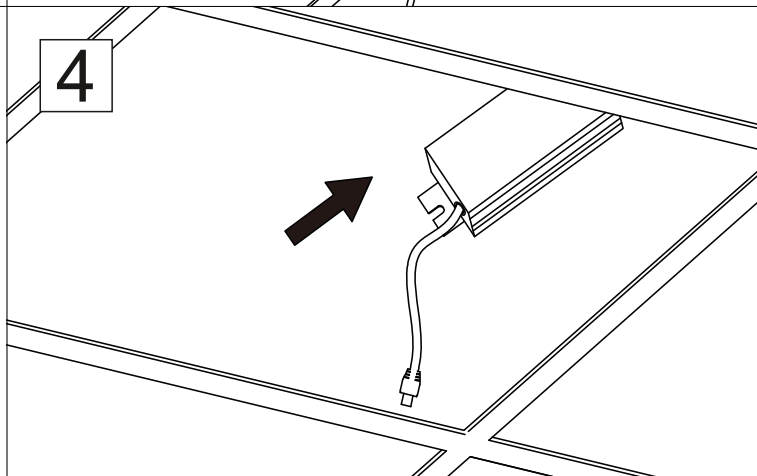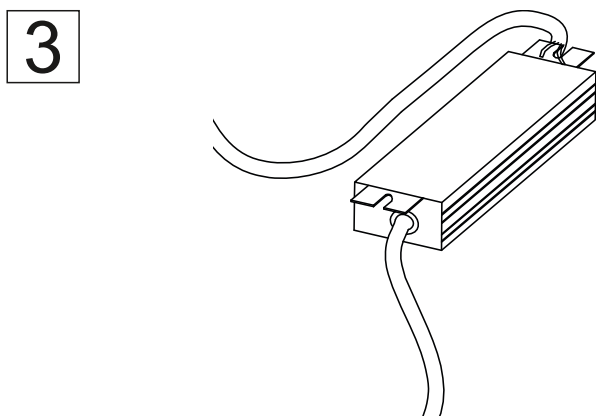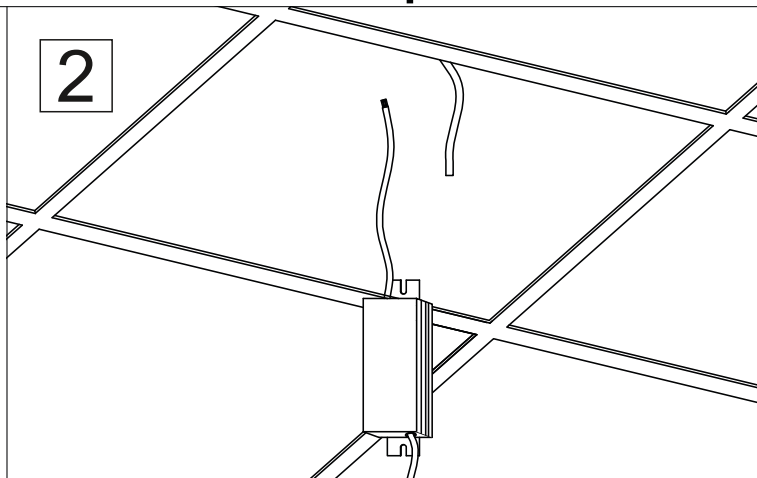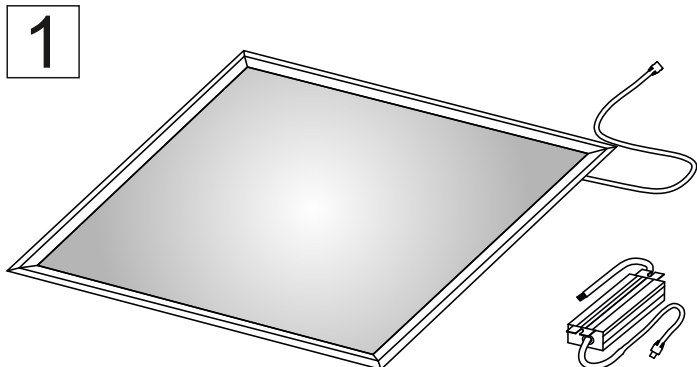



LED PANEL

Zapojení driveru

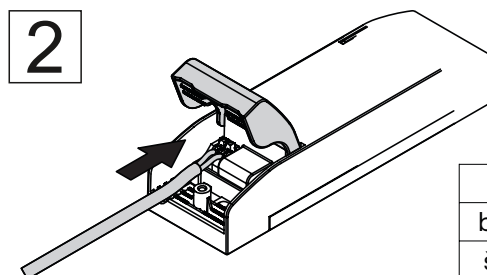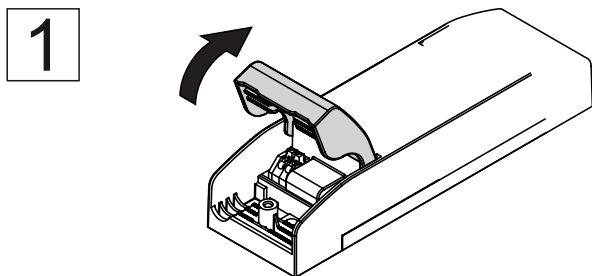


Polarita vodičů

bílá/červená	+
šedá/černá	-

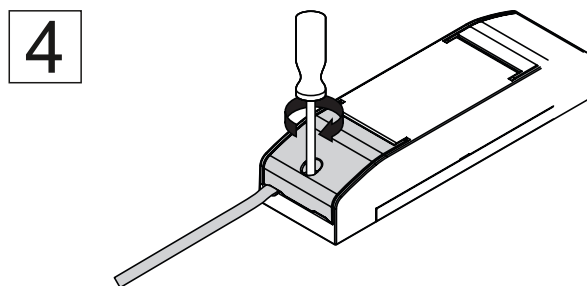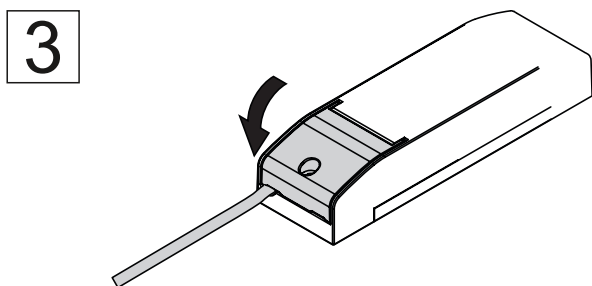

EVG

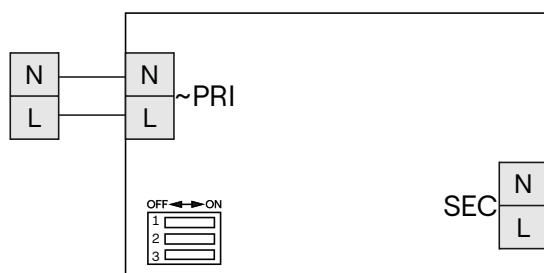

IT FIT 30	400 mA	550 mA	600 mA	750 mA
P (W)	15	20	21	27
Im	2250	3000	3150	4050
PIN1	OFF	ON	OFF	ON
PIN2	OFF	OFF	ON	ON

Označení svítidla

279-043001.010

Počet sv. na jistič

B10 – 20ks

B16 – 33ks

Specifikace

Napájení: 220-240 VAC, 50/60 Hz

Elektrická třída ochrany: II

LED PANEL



CZ

ÚDRŽBA - Před případnou údržbou svítidla, která zahrnuje především čištění optického systému, se ujistěte, že máte vypnuté zdroje přívodu elektrické energie nebo v opačném případě postupujte s vyšší opatrností. Veškeré plochy svítidla je nutné utírat suchým hadříkem bez jakýchkoliv saponátů.

UPOZORNĚNÍ - Před každým zásahem do svítidla nebo prováděním údržby a servisu je nutno svítidlo odpojit od elektrické sítě. Tuto činnost smí provádět pouze osoba s odpovídající elektrotechnickou kvalifikací.

PODMÍNKY PROVOZU - Svítidlo je určeno pro připojení na pevný přívod. Je nutné zabezpečit, aby přívodní kabel nebyl namáhán tahem ani kroucením. Instalaci svítidla smí provádět pouze osoba s odpovídající elektrotechnickou kvalifikací. Přívodní kabel musí mít plné jádro o průřezu od 0,5 do 1,5 mm² a délkou odizolovaných konců 10 mm.

Výrobce nenese odpovědnost za nesprávné zacházení s produkty.

EN

MAINTENANCE - Before any maintenance of the luminaire, which includes cleaning the optical system, be sure to disconnect the power supply or, if not, proceed with great caution. All surfaces of the luminaire must be wiped with a dry cloth without any detergent.

WARNING - Before any intervention on the luminaire or when performing maintenance or servicing, the luminaire must be disconnected from the power supply. This activity may only be carried out by a person with appropriate electrical qualifications.

CONDITIONS OF OPERATION - The luminaire is intended for connection to a fixed power supply. It must be ensured that the supply cable is not subjected to tension or twisting. Installation of the luminaire may only be carried out by a person with appropriate electrical qualifications. The supply cable must have a solid core with a cross-section of 0.5 to 1.5 mm² and a stripped ends length of 10 mm.

The manufacturer is not responsible for incorrect handling of the products.