


HORMEN

ČLEN ČEZ ESCO

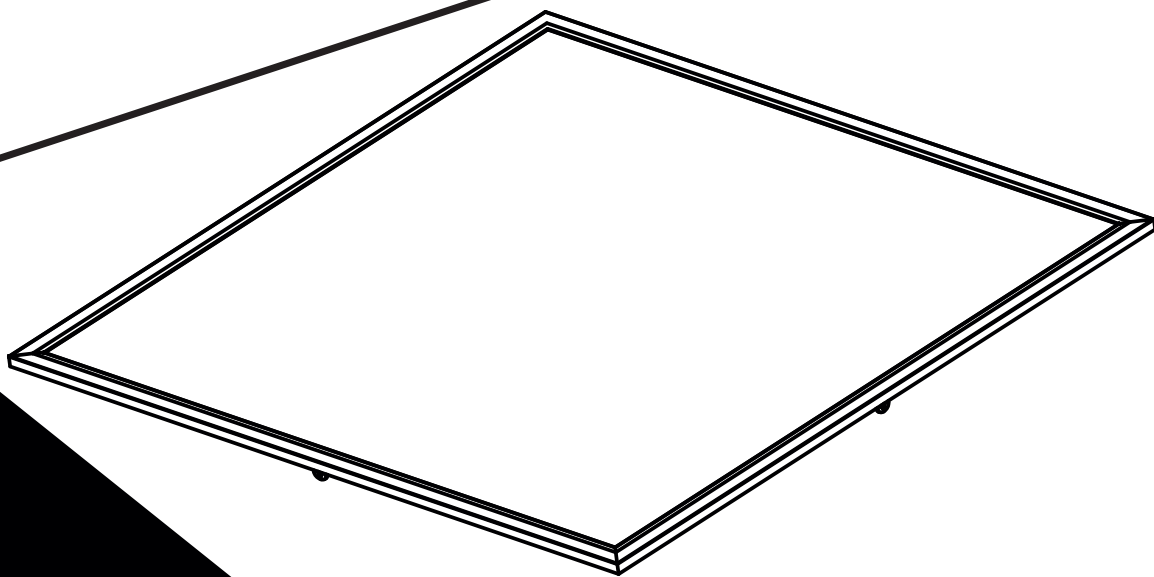


LED PANEL PRO IP54


LED PANEL PRO IP54

Montáž do SDK


1




Rozměry	A(mm)	B(mm)
620x620	605+2	605+2
595x595	577+2	577+2
295x1195	277+2	1177+2




2

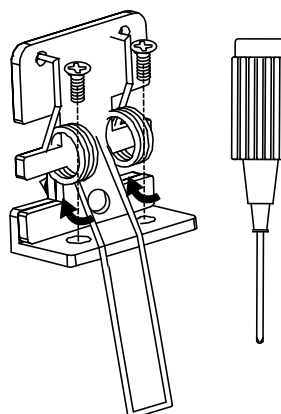


3

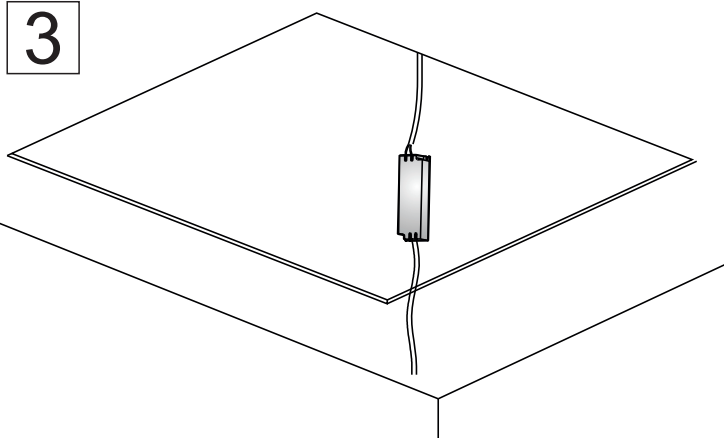


4

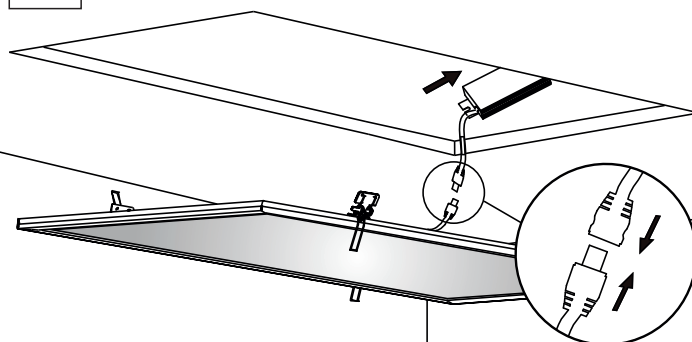

5

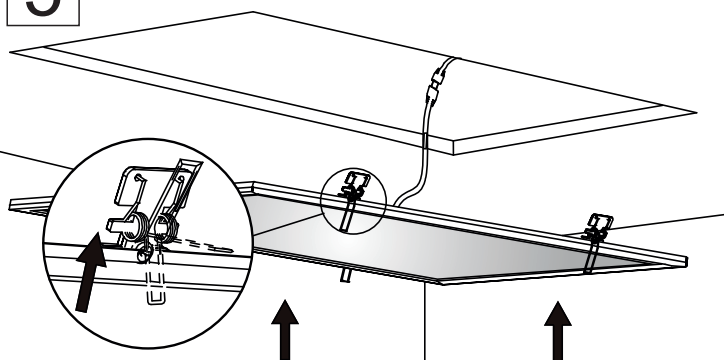







6

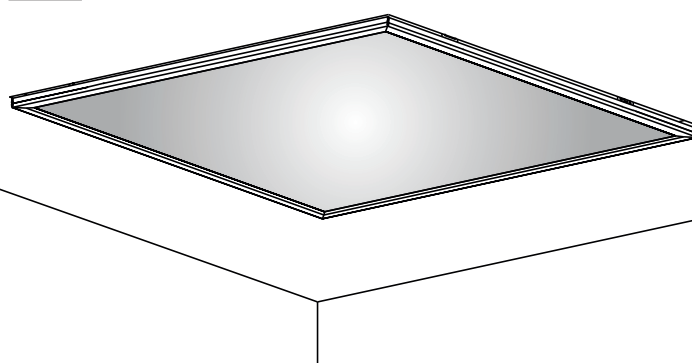

LED PANEL PRO IP54

 **HORMEN**
ČLEN ČEZ ESCO



Vestavná montáž do rastrového stropu

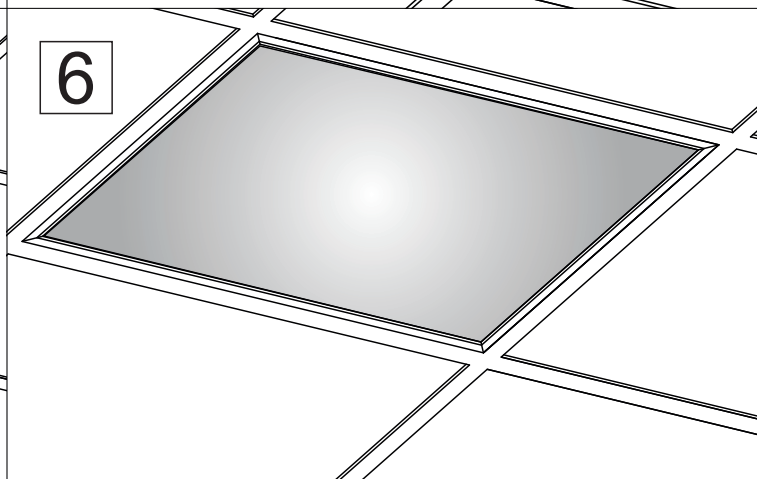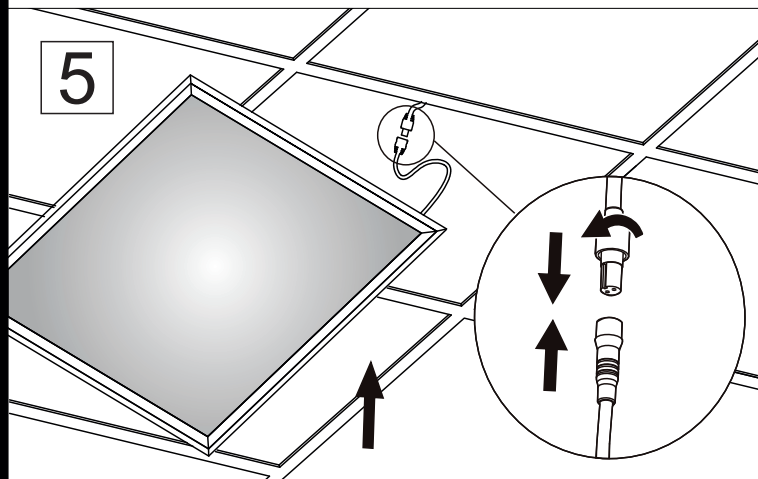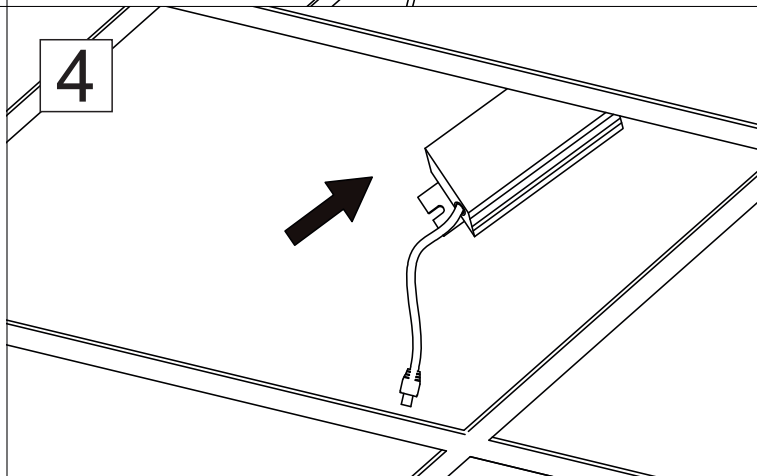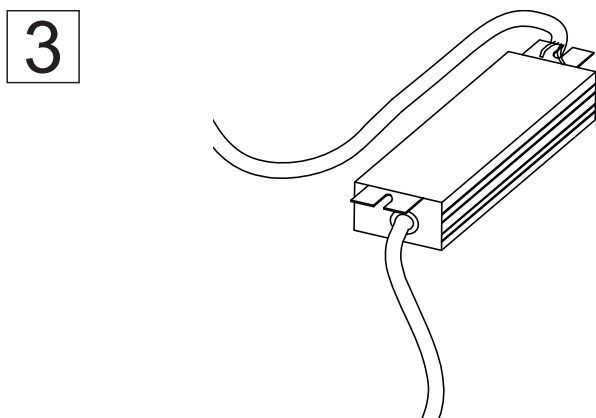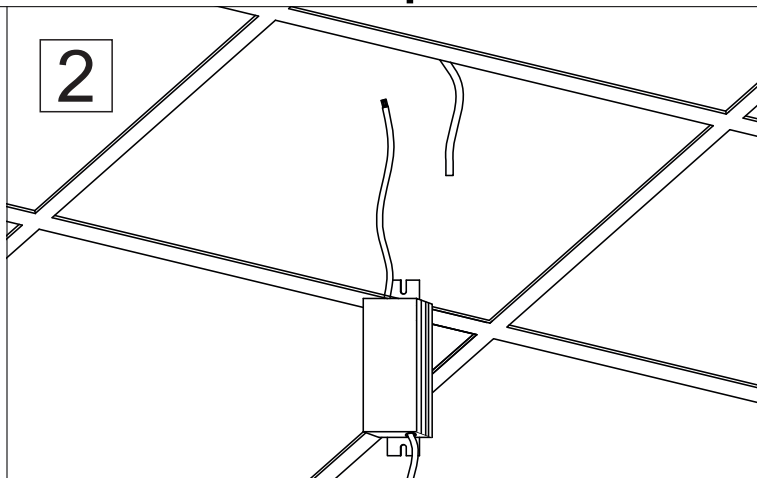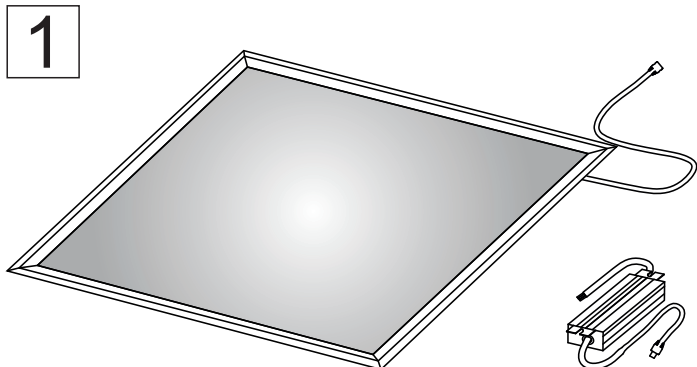

LED PANEL PRO IP54





Zapojení driveru

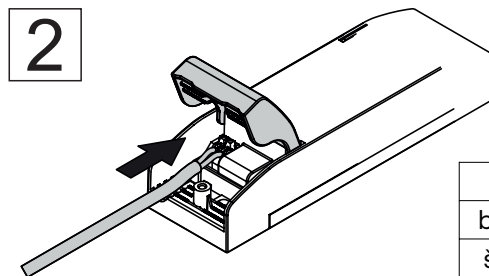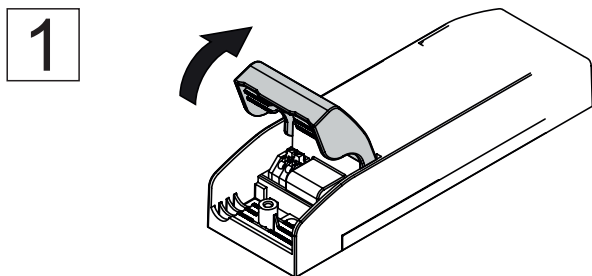


Polarita vodičů


bílá/červená	+
šedá/černá	-

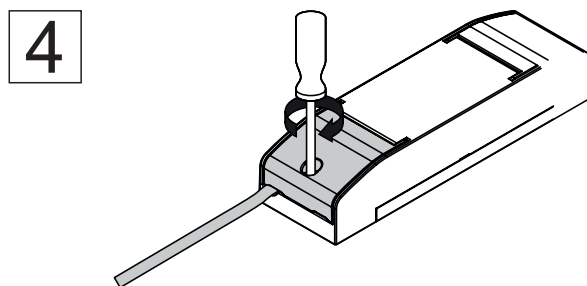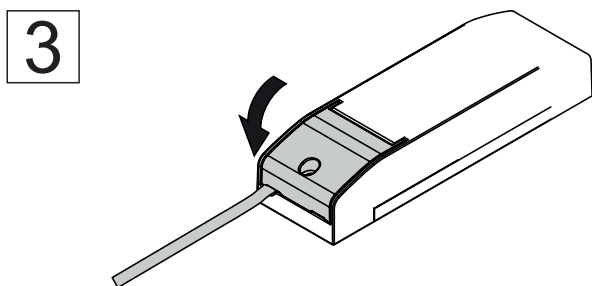

EVG

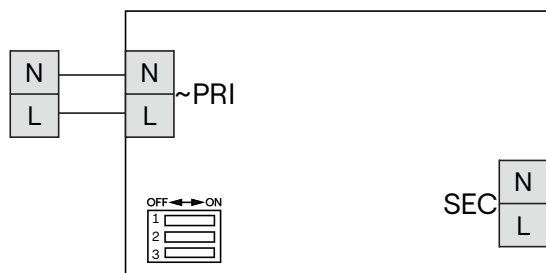

DALI

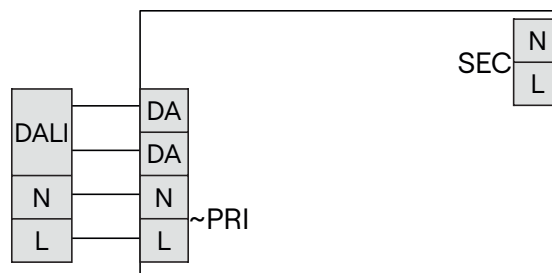

IT FIT 30	350 mA	400 mA	450 mA	500 mA	550 mA	600 mA	650 mA	700 mA
P (W)	12	13,8	15,6	17,3	19	20,6	22,4	24
Im	1880	2130	2400	2660	2940	3170	3440	3720
PIN1	OFF	ON	OFF	ON	OFF	ON	OFF	ON
PIN2	OFF	OFF	ON	ON	OFF	OFF	ON	ON
PIN3	OFF	OFF	OFF	OFF	ON	ON	ON	ON

IT FIT 40	700 mA	750 mA	800 mA	850 mA	900 mA	950 mA	1000 mA	1050 mA
P (W)	24	25,7	27,5	29,2	31	32,8	34,5	36,2
Im	3720	3950	4200	4460	4740	4950	5170	5390
PIN1	OFF	ON	OFF	ON	OFF	ON	OFF	ON
PIN2	OFF	OFF	ON	ON	OFF	OFF	ON	ON
PIN3	OFF	OFF	OFF	OFF	ON	ON	ON	ON

Označení svítidla

279-043010.x10
279-043010.x10.6
279-043110.x10
279-043110.x10.6

Počet sv. na jistič B10A

IT FIT 30/220-240/700 CS I - 36ks
IT FIT 40/220-240/700 CS I - 26ks
TCL professionelle NFC 38 - 30ks

Specifikace

Napájení: 220-240 VAC, 50/60 Hz
Elektrická třída ochrany: II

LED PANEL PRO IP54



CZ

ÚDRŽBA - Před případnou údržbou svítidla, která zahrnuje především čištění optického systému, se ujistěte, že máte vypnuté zdroje přívodu elektrické energie nebo v opačném případě postupujte s vyšší opatrností. Veškeré plochy svítidla je nutné utírat suchým hadříkem bez jakýchkoliv saponátů.

UPOZORNĚNÍ - Před každým zásahem do svítidla nebo prováděním údržby a servisu je nutno svítidlo odpojit od elektrické sítě. Tuto činnost smí provádět pouze osoba s odpovídající elektrotechnickou kvalifikací.

PODMÍNKY PROVOZU - Svítidlo je určeno pro připojení na pevný přívod. Je nutné zabezpečit, aby přívodní kabel nebyl namáhán tahem ani kroucením. Instalaci svítidla smí provádět pouze osoba s odpovídající elektrotechnickou kvalifikací. Přívodní kabel musí mít plné jádro o průřezu od 0,5 do 1,5 mm² a délkou odizolovaných konců 10 mm.

Výrobce nenese odpovědnost za nesprávné zacházení s produkty.


EN

MAINTENANCE - Before any maintenance of the luminaire, which includes cleaning the optical system, be sure to disconnect the power supply or, if not, proceed with great caution. All surfaces of the luminaire must be wiped with a dry cloth without any detergent.

WARNING - Before any intervention on the luminaire or when performing maintenance or servicing, the luminaire must be disconnected from the power supply. This activity may only be carried out by a person with appropriate electrical qualifications.

CONDITIONS OF OPERATION - The luminaire is intended for connection to a fixed power supply. It must be ensured that the supply cable is not subjected to tension or twisting. Installation of the luminaire may only be carried out by a person with appropriate electrical qualifications. The supply cable must have a solid core with a cross-section of 0.5 to 1.5 mm² and a stripped ends length of 10 mm.

The manufacturer is not responsible for incorrect handling of the products.



HORMEN
ČLEN ČEZ ESCO

hormen@hormen.cz
www.hormen.cz